


## **Husky<sup>™</sup> Diaphragm Pumps**

A Complete Family of Stainless Steel Air-Operated Double Diaphragm Pumps with ANSI/DIN Flange Connections

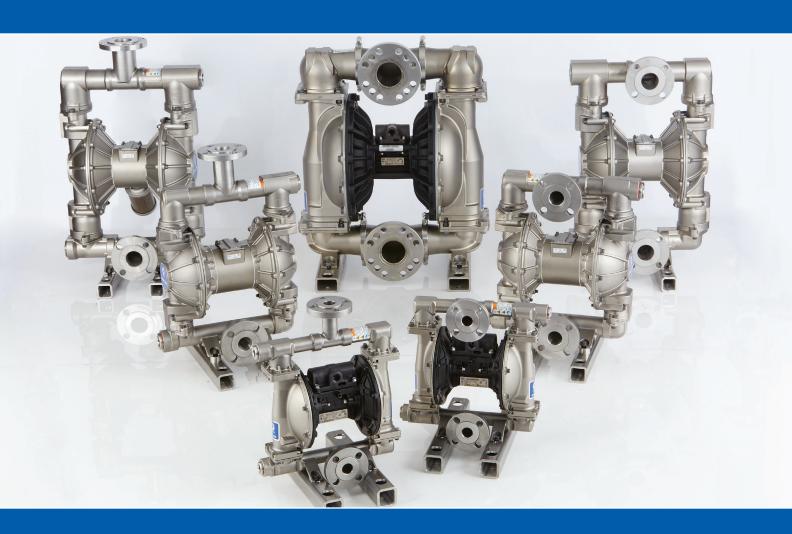

- Rotatable design simplifies installation
- ANSI 150/DIN PN10 stainless steel flanges
- Up to five times longer diaphragm life compared to other diaphragm pumps in its class
- Rugged construction with high corrosion and abrasion resistance

## Simplify installation with our new rotating flange design!

The new rotating flange spins at the inlet and outlet for an easy connection and rapid installation.









With a family of sizes and a variety of materials available for the center section and fluid components, you can select the ideal pump for your application!

Visit <u>www.graco.com/pumpselectors</u> to configure your air-operated double diaphragm pump precisely to your specifications.











Husky™ 1050

Husky™ 1590

Husky™ 2150

Husky™ 3300

## **Technical Specifications**

Model	1050	1590	2150	3300
Maximum fluid working pressure	125 psi (8.6 bar, 0.86 MPa)	120 psi (8.4 bar, 0.84 MPa)	120 psi (8.4 bar, 0.84 MPa)	125 psi (8.6 bar, 0.86 MPa)
Maximum free flow delivery	50 gpm (189 lpm)	100 gpm (378.5 lpm)	150 gpm (568 lpm)	300 gpm (1,136 lpm)
Maximum pump speed	280 cpm	200 cpm	145 cpm	103 cpm
Maximum suction lift	16 ft (4.9 m) dry 29 ft (8.8 m) wet	18 ft (5.5 m) dry or wet	18 ft (5.5 m) dry or wet	16 ft (4.9 m) dry 31 ft (9.4 m) wet
Maximum size pumpable solids	.125 in (3.2 mm)	.19 in (4.8 mm)	.25 in (6.3 mm)	.5 in (13 mm)
Air pressure operating range	20-125 psi (1.4-8.6 bar, 0.14- 0.86 MPa)	20-120 psi (1.4-8.4 bar, 0.14- 0.84 MPa)	20-120 psi (1.4-8.4 bar, 0.14- 0.84 MPa)	20-125 psi (1.4-8.6 bar, 0.14- 0.86 MPa)
Air inlet size	1/2 npt(f)	1/2 npt(f)	1/2 npt(f)	3/4 in npt(f)
Weight	60 lb (27.2 kg) Aluminum Center	96 lb (43.5 kg) Aluminum Center 111 lb (50.3 kg) Stainless Center	139 lb (63 kg) Aluminum Center 162 lb (73.5 kg) Stainless Center	277 lb (126 kg) Aluminum & Polypropylene Center
Instruction Manual	312877	308441	308368	3A0410

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Call today for product information or to request a demonstration. 877.84GRACO (1-877-844-7226) or visit us at www.graco.com.

