



### HD 13/35-4 Cage

This product uses up to 350 bar of pressure to remove even the most stubborn dirt. The robust cage design provides all-round protection and enables safe crane loading. With sack-trolley principle for easy transportation.







#### 1 High-performance crankshaft pump


Reliable and durable Kärcher high-performance crankshaft pump ensures optimal pressure.

#### 2 Safe storage

Accessories and tools are stored in a protected compartment. This means that everything is always in its place.

## **TECHNICAL DATA AND EQUIPMENT**



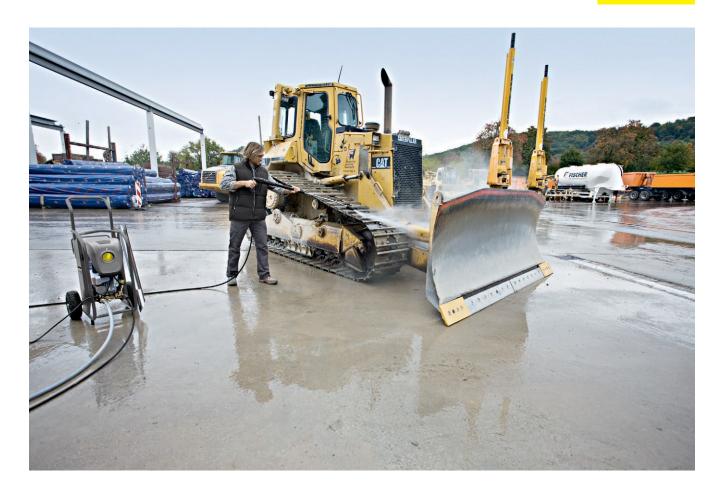

#### HD 13/35-4 Cage

- Robust industrial gun
- Dry run protection (optional)

Technical data		
Order no.		1.367-154.0
EAN code		4039784730984
Working pressure	bar / MPa	100-350 / 10-35
Flow rate	I/h	500-1300
Max. inlet temperature	°C	max. 60
Pump type		Maximum performance Kärcher crankshaft pump
Drive		E-Motor 400 V / 50 Hz
Motor rating	kW	15
Weight	kg	190
Dimensions (L × W × H)	mm	930 × 800 × 920

Equipment		
Electro start		-
High-pressure hose	m	10 / Heavy duty
Spray gun		Industrial trigger gun
Stainless steel lance	mm	700
Flat jet nozzle		1
Safety valve		1
Elapsed time counter		1

■ Included in the scope of supply.

# ACCESSORIES FOR HD 13/35-4 CAGE 1.367-154.0





























		Order no.	Length		Price	Description	
High-pressure hoses			1				
Pressure hose	1	6.391-846.0				650 bar, M 22 x 1.5	
	2	6.391-856.0				650 bar, M 22 x 1.5.	
	3	6.391-848.0				650 bar, M 22 x 1.5	
	4	6.391-857.0				650 bar, M 22 x 1.5.	
	5	6.391-847.0					
	6	6.391-019.0				Durable, abrasion-resistant and flexible multi-layer steel-	
						reinforced hose with connection size M $22 \times 1.5$ . Suitable for up to 620 bar working pressure.	
Grease for stainless steel threaded	7	6.280-180.0				Grease for stainless steel screw connections.	
joints							╚
Trigger guns			1	 			
Kärcher industry gun	8	4.775-824.0				650 bar - industrial spray gun with optimised flow. Robust	-
						ness and durability for professional use. Food-safe and	
						saltwater-resistant materials. Connector for HP hoses M 22	
Shoulder support	9	2.639-251.0				x 1.5. Sturdy shoulder support that must be used from a recoil	+
Shoulder Support	9	2.039-251.0				force of more than 150 N. Fits all Kärcher industrial lances.	
Spray lances						Torce of more than 150 N. Fits an Narcher massinariances.	+
Spray lance	10	4.760-679.0				With nozzle holder.	
Spray lance	11	4.760-653.0				With Hozzie Holder.	
		4.760-675.0				-	
	13	4.760-677.0				-	H
Power nozzles	13	4.700 077.0	1				10
Flat jet nozzle	111	5.765-166.0	1			15°, 350 bar, 1,300 l/h (electr.)	
Detail nozzle	15	5.765-162.0				350 bar, 1,300 l/h (electr.)	
Attachment kits	13	3.703-102.0				330 Bar, 1,300 l/ii (electr.)	
	1 10	2 6 4 4 0 2 2 0	1			Fox electric meters	In
ABS protection against dry run	16	2.641-922.0				For electric motors.	
ABS protection against water shortage	17	2.851-028.0				ABS steering rollers.	
Single-jet rotary nozzles							
F7 power rotary jet	18	6.415-914.0				350 bar, 1.35 mm, 1,300 l/h, M 20 × 1, stainless steel.	
Rotary jet	19	4.767-173.0				350 bar, 1.35 mm, 1,300 l/h, M 20 × 1, brass.	
Power Rotary Jet Repair Kit F7	20	6.025-436.0				Repair kit for power rotary jet for 350 bar working pressur	
Tower Rotary Set Repair Rite 17	20	0.023 430.0				and 1,300 l/h water flow rate, Order No. 6.415-914.0. Inclu	
						des rotor, seat and O-ring (28 × 2).	L
Tool for changing rotor seat	21	6.025-233.0				For single-jet rotary nozzles.	
Pipe cleaning							
Foot valve for pipe cleaning	22	6.470-223.0				Foot valve for convenient and safe use of accessories for	
						effective pipe cleaning.	1
Pipe cleaning nozzle, standard	23	5.763-090.0				Standard pipe cleaning nozzle for pipe cleaning hoses with	1_
						G1/4" threaded connection. Nozzle configuration: 3x back-	
Bias dessires and 1 C		F 760 004 0				ward.	-
Pipe cleaning nozzle, Quattro	24	5.763-091.0				For pipe cleaning hoses with G1/4" threaded connection: Quattro pipe cleaning nozzle. Nozzle configuration: 3x back	L
						ward and 1x forward.	-   🗆
Pipe cleaning nozzle, Rotor	25	5.763-092.0				For pipe cleaning hoses with G1/4" threaded connection:	+
TIPE CICUITING HOZZIC, NOLUI	25	3.703 032.0				Rotor pipe cleaning nozzle. Nozzle configuration: 3x back-	
						ward.	1

<sup>■</sup> Included in the scope of supply. 

Available accessories.

## **ACCESSORIES FOR HD 13/35-4 CAGE** 1.367-154.0

















		Order no.	Length		Price	Description	
Pipe cleaning hose	26	6.392-401.0				Flexible pressure hose (DN 8) for thorough pipe cleaning. 1C m long. Threaded connection for G1/4" nozzle.	
	27	6.392-402.0				Flexible pressure hose (DN 8) for thorough pipe cleaning. With threaded connection for G1/4" nozzle and 20 m long.	
	28	6.392-403.0				For through pipe cleaning: flexible, 30 m long pressure hose with threaded connection for G1/4" nozzle.	
Surface cleaner							
Surface Cleaner FRI 50 Me	29	2.643-577.0				Surface cleaner for efficient cleaning of surfaces up to 500 bar and hot water cleaning up to 100°C. 4 convenient steering rollers. Specific nozzle kits must be ordered separately.	
Nozzle package 025 FRI 50 Me	30	6.415-045.0				Nozzle kit specifically for FRI 50 Me Surface Cleaner. Nozzle size: 025.	
Abrasive blaster							
Required adapter for abrasive blasters	31	5.401-325.0				M 20 x 1 IG to 9/16" UNF AG.	
Replacement nozzle for abrasive blaster	32	6.025-346.0				Replacement nozzle for abrasive spray head made from boron carbide. Colour blue.	
F98 nozzle kit, D 0.70 mm	33	9.886-551.0				For wet sand blasting: three-nozzle kit for abrasive spray head. Nozzle size 0.7 mm.	
F98 nozzle for abrasive blaster	34	6.025-255.0				Nozzle (nozzle size 0.7 mm) for abrasive spray head for well sand blasting.	
Suction lance	35	6.025-258.0				For the suction of spray agents.	
Abrasive material hose	36	6.025-308.0				Abrasive hose.	
Mounting tool for nozzle set	37	6.025-257.0				For F98 nozzles.	
Abrasive	38	6.025-309.0				25 kg, 0.5-1.00 mm, garnet sand.	
	39	6.025-310.0				25 kg, 0.7-1.40 mm, garnet sand.	
Multi-jet rotary nozzles				,		,	
Nozzle carrier head	40	9.899-828.0				Nozzle holder for F21 nozzle. Suitable for working pressure of up to 3000 bar. 35° spray angle, includes guard and flow conditioner.	
Round jet nozzle	41	9.886-216.0				F21 screw-on sapphire round jet nozzle, 0.90 mm diameter, suitable for working pressures of up to 3000 bar.	
F21 dummy nozzle - no hole	42	6.025-237.0				F21 screw-on dummy nozzle for working pressures of up to 3000 bar.	

<sup>■</sup> Included in the scope of supply. 

Available accessories.

## **ACCESSORIES FOR HD 13/35-4 CAGE** 1.367-154.0



							$\neg$
		Order no.			Price	Description	
Coupling							
Coupling	1	4.403-004.0				For connecting and extending HP hoses. Connection 2 × M22 × 1.5. Brass with rubber protection.	

<sup>■</sup> Included in the scope of supply. 

Available accessories.